

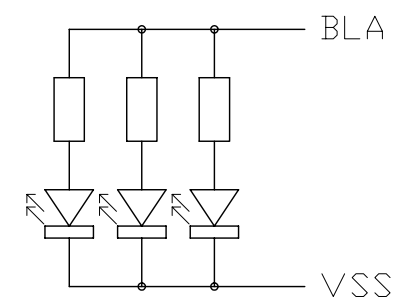



Terminal	
No.	Pin Name
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	BLA
16	VOUT

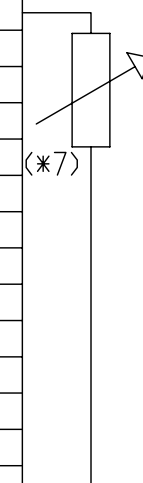

Backlight Circuit
Scale=free

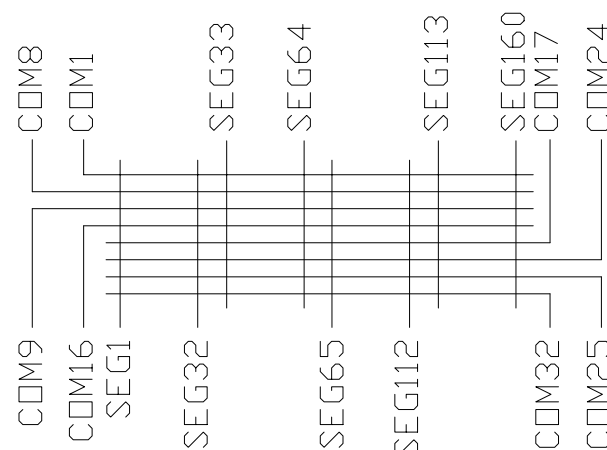

Wiring Details
Scale=free

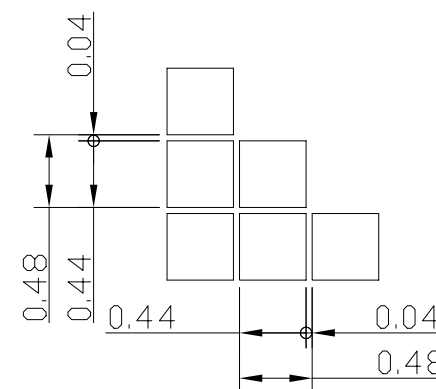

Pixels Details
Scale=20/1

- Note:
- *1. LCD Display Type : STN, Positive, Transflective
 - *2. Viewing Direction : 6H
 - *3. LCD Driving Duty : 1/33duty
 - *4. Backlight Color : White
 - *5. Operating Temperature : -20°~70° Δ
 - *6. Storage Temperature : -30°~80° Δ
 - *7. A VR(5k) must be connected externally for Contrast Control. Otherwise, external LCD supply should be given to V0.

C		
B		
A	-Revise TOP & TST	Li Shuai 2004-04-27
Rev	Note	Date
Dwg Title LM16032DDC-0*-01 Outline Dwg		
Dwg No.	MK-000383a-1-1	Date 2004-02-04
Scale 2/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Li Shuai

TOPWAY