


Terminals Details
(Conductor Side)
Scale=4/1

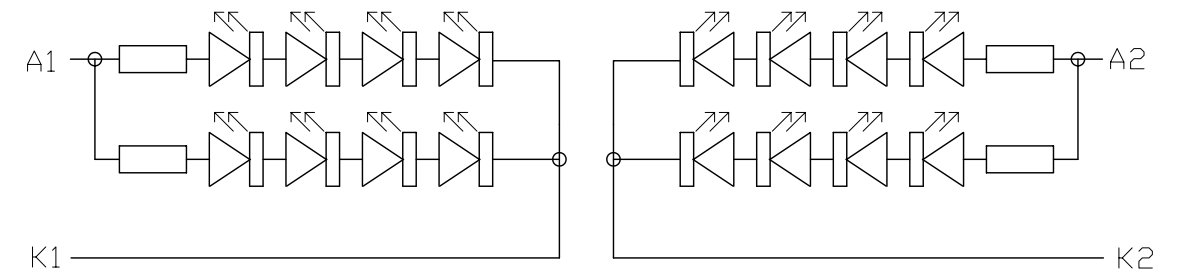

Backlight Circuit Details
(No. of LED = 2x8=16pcs)
Scale=free

Note:

- *1. LCD Display Type: TFT, Transmissive
- *2. Viewing Direction : 12H
- *3. Pixel Arrangement: RGB-SPRIPE
- *4. Operating Temperature : -20°C~70°C
- *5. Storage Temperature : -30°C~80°C Δ
- *6. Backlight: White LED

Terminal No	Pin Name
1	NC
2	NC
3	NC
4	NC
5	NC
6	NC
7	PDL
8	/RES
9	SPENA
10	SPCLK
11	SPDAT
12	B0
13	B1
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7
36	HSYNC
37	VSYNC
38	DCLK
39	VDD
40	VDD
41	VCC
42	VCC
43	NC
44	NC
45	VGL
46	NC
47	VGH
48	NC
49	NC
50	NC
51	VCOM
52	ENB
53	GND
54	AVSS

D	Refine Outline	Linyan 2007-02-10
C	Typing Correction	Linyan 2006-12-28
B	Refine Outline & Typing Correction	Linyan 2006-11-03
A	Revise Top & Tst	K.C. 2006-10-07
Rev/Note		Date
Dwg Title LMT057DNAFWU Outline Dwg		
Dwg No.	MK-001350d-1-1	Date 2006-08-03
Scale 1/1	Tol. ±0.5	Unit mm
		Paper Size A3
Approved	Checked	Drawn Lin Yan

TOPWAY