




Terminal	
No.	Pin Name
1	VOUT
2	V0
3	VSS
4	VDD
5	BUSY (*8)
6	NC
7	/CS
8	RS
9	/WR
10	/RD
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	/RST
20	NC
21	BLA
22	BLK
23	BLA
24	BLK
25	BLA
26	BLK

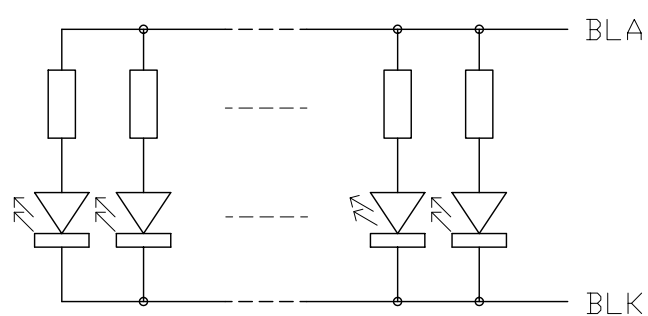

Backlight Circuit Details
(No. of LED = 10pcs)
Scale=free

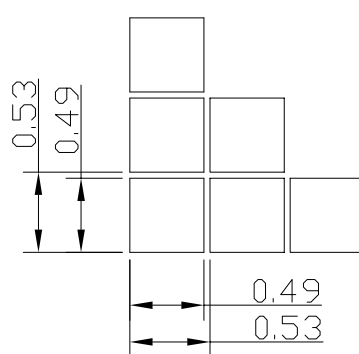

Pixels Details
Scale=20/1

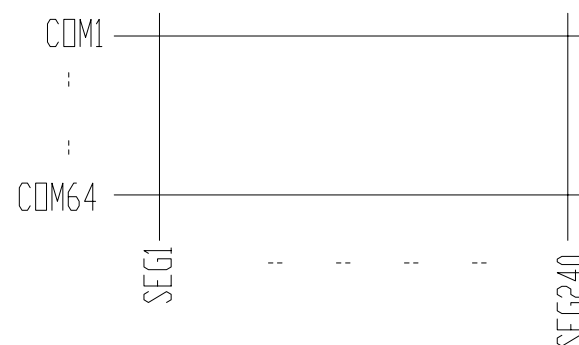

Wiring Details
Scale=free

Note:

- *1. LCD Display Type : STN-Gray, Positive, Transflective
- *2. Viewing Direction : 6H
- *3. Duty : 1/64
- *4. Operating Voltage : 5.0V
- *5. Backlight Color : White
- *6. Operating Temperature : -20°C~70°C
- *7. Storage Temperature : -30°C~80°C
- *8. An external VR(25K to 50K) must be connected for Contrast Control
- *9. Environmental Safe Standard: RoHS

C		
B		
A		
Rev/Note		Date
Dwg Title	LM6066-1 Outline Dwg	
Dwg No.	MK-001371-1-1	Date 2006-08-21
Scale	Tol. ±0.5	Unit mm Paper Size A3
Approved	Checked	Drawn Lin Yan

TOPWAY