



Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A1
8	/RESET
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	NC
18	VOUT
19	BLA
20	BLK




Pixels Details
Scale=30/1

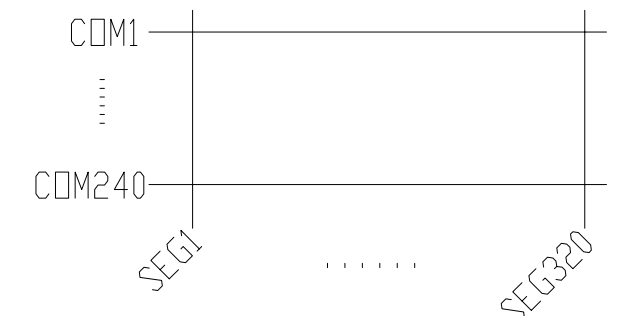

Wiring Details(Top View)
Scale=Free

- Note:
- *1. Display Type : STN, Negative, Transmissive
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/240, Bias : 1/14
 - *4. Backlight Color : White
 - *5. Backlight Supply : 170mA(3.3V TYP.)
 - *6. Operating Voltage : 3.3V Δ
 - *7. Operating Temperature : -20°C~70°C
 - *8. Storage Temperature : -30°C~80°C
 - *9. Controller : T8000 or equivalent
 - *10. An external VR(25K to 50K) must be connected for Contrast Control

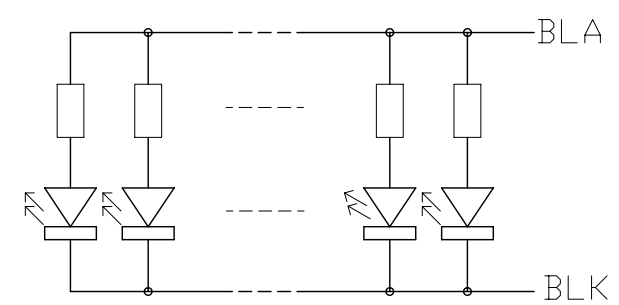

Backlight Circuit
(No. of LEDs = 10pcs)
Scale=free

C		
B		
A	Revise Operating Conditaon	Zhou Huifang 2008-05-10
Rev/Note		Date
Dwg Title	LM320240TFW Outline Dwg	
Dwg No.	MK-002330a-1-1	Date 2008-03-08
Scale	6/5	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Zhou Huifang

