



Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A1
8	/RESET
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	/WAIT
18	/VOUT
19	BLA
20	BLK

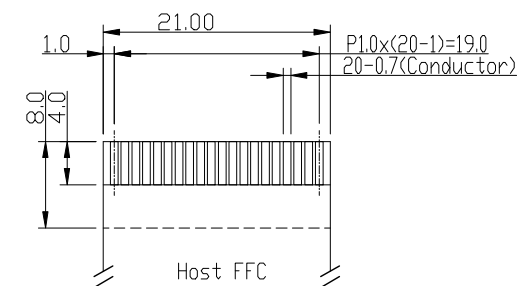

- Note:
- *1. LCD Display Type : STN, Negative, Transmissive
 - *2. Duty : 1/240 , Bias : 1/16
 - *3. Operating Voltage : 3.3V
 - *4. Backlight Color : White
 - *5. Backlight Power Supply : 3.3V TYP.
 - *6. Operating Temperature : -20°C~70°C
 - *7. Storage Temperature : -30°C~80°C
 - *8. Controller : T8000 or equivalent
 - *9. An external VR(25K to 50K) must be connected for Contrast Control

C		
B	Update Outline	Yang Lin 2009-06-10
A	Typing Correction	Zhou Huifang 2008-05-08
Rev/Note		Date
Dwg Title LM32019CFW Outline Dwg		
Dwg No.	MK-002424b-1-1	Date 2008-04-30
Scale 1/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Zhou Huifang

TOPWAY