



Panel Wiring Details
Scale=free

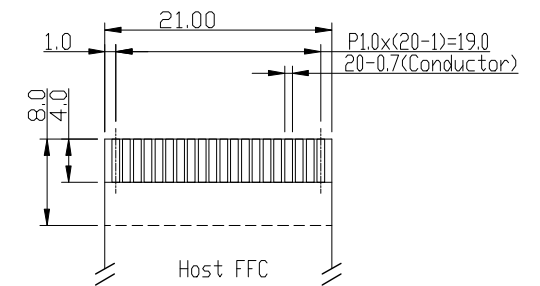


Conductor Side Details
Scale=2/1



Pixels Details
Scale=15/1

Terminal No.	Pin Name
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A1
8	/RESET
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	/WAIT
18	/VOUT
19	BLA
20	BLK



Note:

- *1. LCD Display Type : FSTN, Positive, Transmissive
- *2. Duty : 1/240 , Bias : 1/16
- *3. Operating Voltage : 3.3V
- *4. Backlight Color : White
- *5. Backlight Power Supply : 3.3V TYP.
- *6. Operating Temperature : -20°C~70°C
- *7. Storage Temperature : -30°C~80°C
- *8. Controller : T8000 or equivalent
- *9. An external VR(25K to 50K) must be connected for Contrast Control

C		
B		
A	Update Outline	Yang Lin 2009-06-10
Rev	Note	Date
Dwg Title LM32019CCW Outline Dwg		
Dwg No.	MK-002538a-1-1	Date 2008-07-09
Scale 1/1	Tol. ±0.5	Unit mm
Approved	Checked	Paper Size A3
		Drawn Zhou Huifang

