


Terminal (K1)			
Name	No	No	Name
VDD_BL	2	1	VDD_BL
VDD	4	3	VDD
VSS	6	5	VSS
/RD	8	7	/WR
RS	10	9	/CS
D14	12	11	D15
D12	14	13	D13
D10	16	15	D11
D8	18	17	D9
D6	20	19	D7
D4	22	21	D5
D2	24	23	D3
D0	26	25	D1
VSS	28	27	VSS
DDOUT	30	29	/PENIRQ
DIN	32	31	BUSY
DCLK	34	33	/CS_TP
VSS	36	35	VSS

Preliminary

- Note:
- *1. LCD Display Type: TFT, Transmissive
 - *2. Pixel Arrangement: RGB-SPRIPE
 - *3. Color Depth: 65k colors
 - *4. Logic Supply: 3.3V
 - *5. Backlight Supply: 5.0V
 - *6. Backlight: LEDs
 - *7. Operating Temperature: -20°C~70°C
 - *8. Storage Temperature: -30°C~80°C
 - *9. Environmental Standard: ROHS

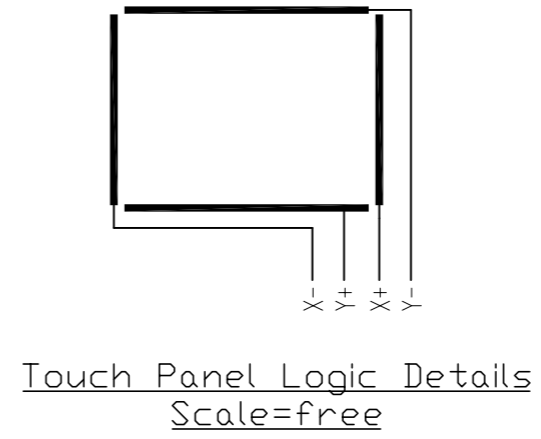

C			
B			
A	Add Dimension Correct Height		K.C. 2011-01-17
Rev	Note		Date
Dwg Title	LMT070DICFWD-NBA Outline Dwg		
Dwg No.	MK-003524a-1-1		Date 2011-01-12
Scale	Tol.	Unit	Paper Size
1/1	±0.5	mm	A3
Approved	Checked	Drawn	K.C.

TOPWAY